



LUMASCAPE

**MODELS** LS501-6X-XX  
Mains Voltage,  
Check fixture for wattage.  
IP65 rated



# A IMPORTANT INSTRUCTIONS


For Installation 501 METRO: SURFACE MOUNT ONLY

Warning: The Luminaire should only be used complete with its protective shield (cover)

Lumascap Lighting Industries Pty Ltd  
38-44 Enterprise Street, Cleveland, QLD 4163, Australia  
PO Box 1875, Cleveland D.C., QLD 4163, Australia  
T 07 3286 2299  
F 07 3286 6599  
E sales@lumascap.com.au  
W www.lumascap.com.au

Note: To achieve IP65 rating, use round cable (size 5-10mm) to suit entry gland supplied with fixture.


**1** Please exercise caution when placing fixture. Place at or above head height.

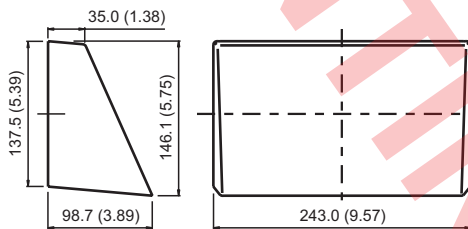

### Mark and cast/drill holes

Mark locations of fixtures and cable entry/mounting holes. Refer template over for details. Drill or cast holes as required.


**2**

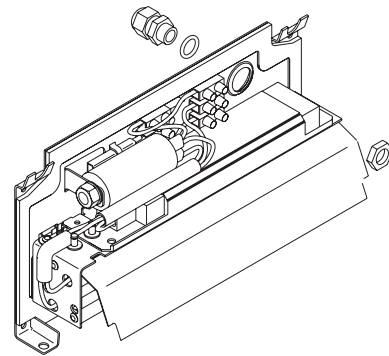

### Fit cable gland and o-ring to fixture

Remove lid from fixture and insert cable gland and o-ring into base (optional, required for IP65 rating)

**3**

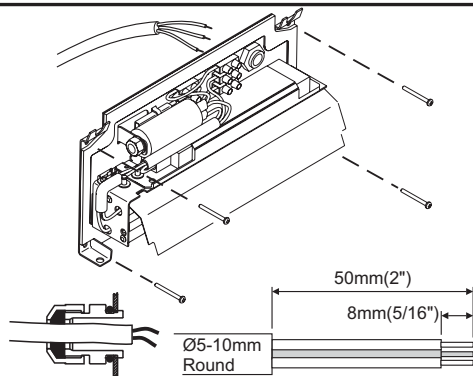


### Insert cable and screw to mounting surface

Strip cable and feed through gland and tighten. Screw fixture to mounting surface.

Note: Ensure only round supply cable is used and cable gland seals on the outer insulation to ensure maximum IP rating.


**4**

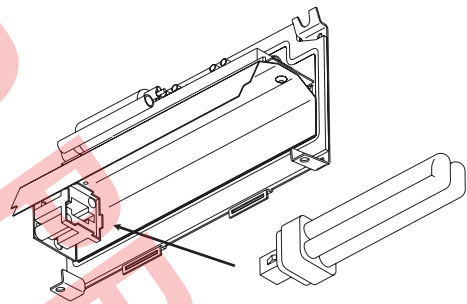

### Insert lamp into fixture

Check wattage and insert lamp into fixture. Test to ensure lamp and fixture is operational.


**5**

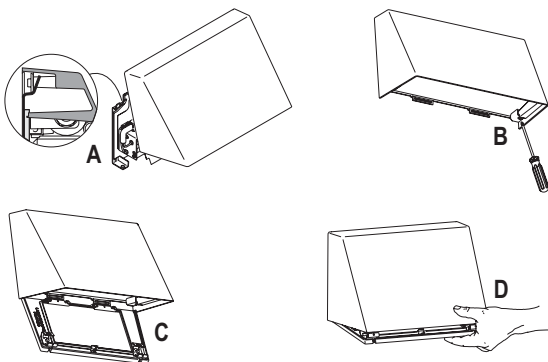

### Attach lid and cover

Latch cover onto fingers on mounting plate and insert screws. Attach cover to bottom of mounting plate and clip shut.

## RELAMPING

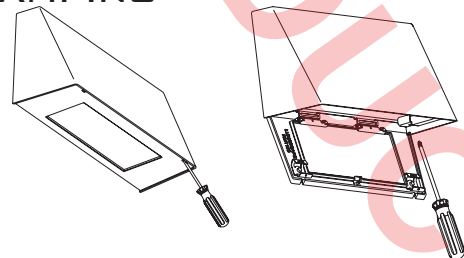

### Isolate and open fixture

Ensure fixture is electrically isolated before proceeding. Gently unclip at each of the two recesses with a small blade screwdriver. Cover does not have to be removed. Remove screws and lift lid off.

### Relamp and Reseal Fixture

Relamp fixture as per instruction 4. Test and reseal as per instruction 5.

[www.lumascap.com.au](http://www.lumascap.com.au)

LUMASCAPE  
HEAD OFFICE  
T 07 3286 2299 F 07 3286 6599

LUMASCAPE  
SYDNEY - NSW  
T 02 9519 8860 F 02 9519 8834

LUMASCAPE  
MELBOURNE - VIC  
T 03 9686 1900 F 03 9686 1700

H.I. LIGHTING  
LUMASCAPE AGENT - WA  
T 08 9321 5422 F 08 9321 5881

LIGHTING PARTNERS AUSTRALIA  
LUMASCAPE AGENT - SA  
T 08 8232 0074 F 08 8232 0076

NQ LIGHTING  
LUMASCAPE AGENT - NTH QLD  
T 07 4031 4490 F 07 4031 5933

ECC LIGHTING  
LUMASCAPE AGENT - NZ  
T 09 379 9680 F 09 308 9328

LUMASCAPE USA INC  
Free Call 1-866-695-LUMA(5862)  
T 1-(650)-595-LUMA(5862) 1-(650)-595-8820

## IMPORTANT SAFETY INSTRUCTIONS

### WARNING - To reduce the risk of FIRE or INJURY:

1. Luminaires and transformers to be installed by qualified installers only.
2. Luminaires to be used for intended purpose only. e.g Wall Mount fittings must be wall mounted.
3. Luminaires can become very hot. Use discretion in placement.
4. Do not touch hot lens, guard, or enclosure.
5. CAUTION - HOT SURFACE. Keep away from curtains and other combustible material.
6. Turn Off/Unplug and allow to cool before replacing lamp.
7. Keep lamp away from materials that may burn.
8. Never touch lamp with bare fingers. Oil from skin may damage lamp. Hold lamp with soft cloth when installing or replacing.
9. Do not operate the luminaires with a missing or damaged parts.
10. Replace any cracked protective shield
11. Use only lamp type, voltage and wattage as specified by Lumascope on the product label.
12. Use only genuine Lumascope parts to replace damaged or missing components.
13. Luminaires supplied with Loctite Silver Grade Anti Seize lubricant on threads. Reapply if needed.
14. Refer to instructions for installation and operating requirements.
15. Ensure installation complies with local regulations

### SAVE THESE INSTRUCTIONS.

**Mounting Template, 1:1**

