

IMPORTANT INSTRUCTIONS

For Installation LSTE4, LSTE5

A
START
HERE

MODELS	LSTE4 20-50VA, LSTE5 105VA	
Primary	240V 50-60Hz	
Secondary	11.5V	

Note: To achieve IP65 rating, use round cable (size 5-10mm) to suit entry gland supplied with fixture.



LUMASCAPE

LUMASCAPE LIGHTING INDUSTRIES PTY LTD

Head Office and Factory
38-44 Enterprise Street, Cleveland,
QLD Australia 4163
PO Box 1875, Cleveland D.C.,
QLD Australia 4163
Tel 07 3286 2299 Fax 07 3286 6599

International
Telephone 61 7 3286 2299
Fax 61 7 3286 6599

New South Wales
Tel (02) 9519 6860 Fax (02) 9519 8834

Victoria
Tel (03) 9686 1900 Fax (03) 9686 1700

www.lumascope.com.au

ABN: 21 010 572 773



LUMASCAPE

USA

LUMASCAPE USA INC.

US Head Office
1300 Industrial Rd., Unit #19
San Carlos, CA 94070
USA

Telephone
1-(650)-595-LUMA(5862)

Fax
1-(650)-595-5820

www.lumascope.com

Free Call
1-866-695-LUMA(5862)
(US & Canada)

1

To suit 6# screw, 38 (1.5in) deep

Cable entry Ø25 x 38 Min (1.0 x 1.5 in)

To suit 6# screw, 38 (1.5in) deep

Mark locations of fixtures. Run cables.
Mark and drill/cast holes. Refer drawing over.

2

Fit gland, (Supplied with light fixture) to transformer enclosure. Ensure gland is firmly tightened and sealing area is free from debris.

3

Terminate supply cable in transformer enclosure and tighten cable gland onto cable.
Note: Ensure only round supply cable is used and cable gland seals on the outer insulation to ensure maximum IP rating..

4

Screw transformer enclosure to mounting surface. (Using mounting screws supplied with fixture.)

5

LSTE4/5

Seal

Fixture Base

Screw 3 off

Attach seal (Adhesive Side to Fixture Base) and fixture to enclosure.

6

Toothed Washer

Earth Lead

Flat Washer

Nut

Terminate fixture. Ensure earth lead is connected.

7

Assemble fixture as per fixture installation instructions.

IMPORTANT SAFETY INSTRUCTIONS

WARNING - To reduce the risk of FIRE or INJURY:

1. Luminaires and transformers to be installed by qualified installers only.
2. Luminaires to be used for intended purpose only. e.g Wall Mount fittings must be wall mounted.
3. Luminaires can become very hot. Use discretion in placement.
4. Do not touch hot lens, guard, or enclosure.
5. CAUTION - HOT SURFACE. Keep away from curtains and other combustible material.
6. Turn Off/Unplug and allow to cool before replacing lamp.
7. Keep lamp away from materials that may burn.
8. Never touch lamp with bare fingers. Oil from skin may damage lamp. Hold lamp with soft cloth when installing or replacing.
9. Do not operate the luminaires with a missing or damaged parts.
10. Replace any cracked protective shield
11. Use only lamp type, voltage and wattage as specified by Lumascap on the product label.
12. Use only genuine Lumascap parts to replace damaged or missing components.
13. Luminaires supplied with Loctite Silver Grade Anti Seize lubricant on threads. Reapply if needed.
14. Refer to instructions for installation and operating requirements.
15. Ensure installation complies with local regulations

SAVE THESE INSTRUCTIONS.

LUMASCAPE
 HEAD OFFICE - QLD
 Tel (07) 3286 2299
 Fax (07) 3286 6599

LUMASCAPE
 SYDNEY - NSW
 Tel (02) 9519 6860
 Fax (02) 9519 8834

LUMASCAPE
 MELBOURNE - VIC
 Tel (03) 9686 1900
 Fax (03) 9686 1700

LUMASCAPE USA INC.
 SAN FRANCISCO - CA
 Tel 1-(650)-595-5862
 Fax 1-(650) 595-5820

H.I. LIGHTING
 LUMASCAPE AGENT - WA
 Tel (08) 9321 5422
 Fax (08) 9321 5881

LIGHTING PARTNERS AUSTRALIA
 LUMASCAPE AGENT - SA
 Tel (08) 8232 0074
 Fax (08) 8232 0076

NQ LIGHTING
 LUMASCAPE AGENT - NTH QLD
 Tel (07) 4031 4490
 Fax (07) 4031 5933

ECC LIGHTING
 LUMASCAPE AGENT - NZ
 Tel (09) 379 9680
 Fax (09) 308 9328


IMPORTANT INSTRUCTIONS

Dimensional Details LSTE4 LSTE5

B

MODELS	LS441A	 
	12V 50watt max. IP67 rated	

Mounting Template, 1:1

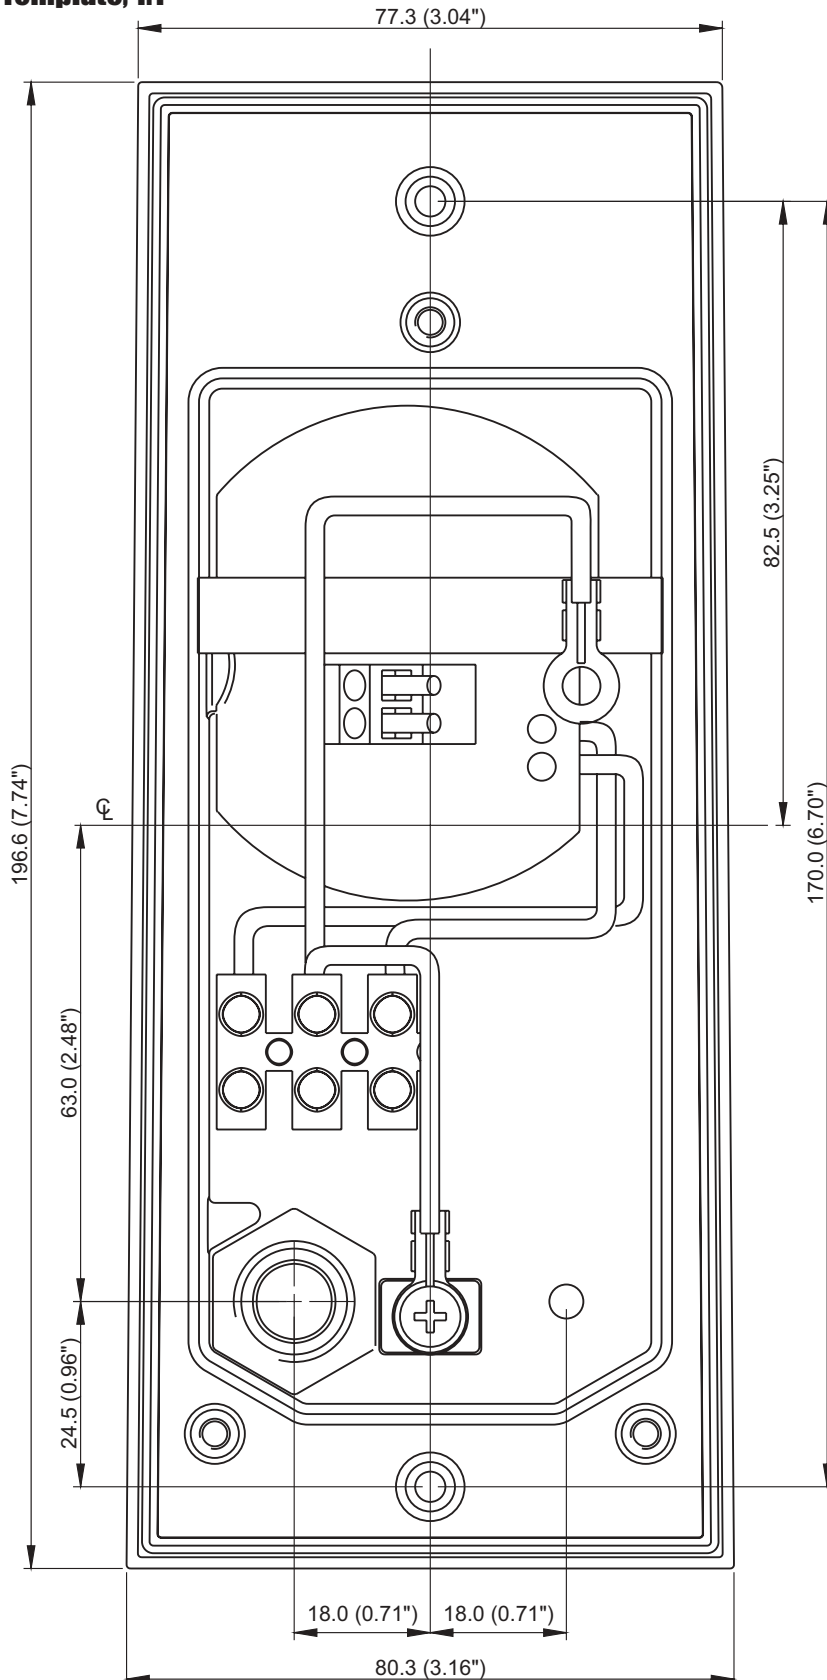

LUMASCAPE

**LUMASCAPE LIGHTING
INDUSTRIES PTY LTD**

Head Office and Factory
38-44 Enterprise Street, Cleveland,
QLD Australia 4163
PO Box 1875, Cleveland D.C.,
QLD Australia 4163
Tel 07 3286 2299 Fax 07 3286 6599

International
Telephone 61 7 3286 2299
Fax 61 7 3286 6599

New South Wales
Tel (02) 9519 6860 Fax (02) 9519 8834

Victoria
Tel (03) 9686 1900 Fax (03) 9686 1700

www.lumascope.com.au

ABN: 21 010 572 773



LUMASCAPE
USA INC.

LUMASCAPE USA INC.

US Head Office
1300 Industrial Rd., Unit #19
San Carlos, CA 94070
USA

Telephone
1-(650)-595-LUMA(5862)

Fax
1-(650)-595-5820

www.lumascope.com

Free Call

1-866-695-LUMA(5862)
(US & Canada)