



**SPECIFICATIONS**

|                              |   |
|------------------------------|---|
| <b>Input Voltage</b>         | 220-240 V AC, 50 Hz   |
| <b>Output</b>                | 12 V AC, 50/60 Hz   |
| <b>Oversupply Protection</b> | Yes   |
| <b>Thermal Protection</b>    | Yes - via internal self-resetting thermal cut-out   |
| <b>Construction</b>          | High pressure die-cast aluminium body<br>Powder coated<br><ul style="list-style-type: none"> <li>■ Black</li> <li>■ Silver</li> </ul> |
| <b>Wattage</b>               | 10-50 W   |
| <b>IP Rating</b>             | IP67 (when fitted with cable gland and LS454)   |

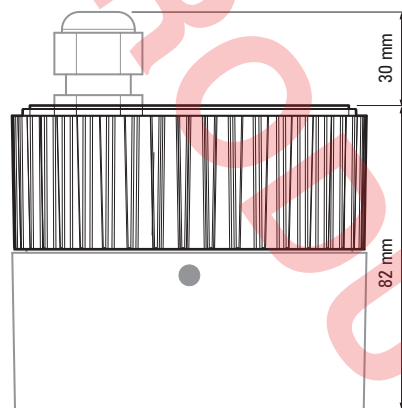

**LSTE6-2 Integral Transformer**  
12 V AC Output

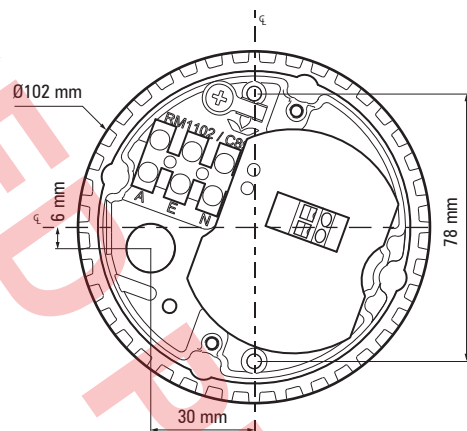

**LSTE6-2 and LS454A**